



www.vcx.com.pl

KARTA KATALOGOWA

Ogranicznik przepięć klasy T1T2 L2 RED (B+C) 4P 12,5 kA



- Dedykowane są do ochrony instalacji zasilających nN przed skutkami przepięć indukowanych i łączeniowych. Mogą być instalowane do sieci typu: TN-S, TN-C, IT, TT.
- Powinny być stosowane jako jednocześnie pierwszy i drugi stopień ochrony w tablicach piętrowych, podrozdzielniach. Ochronniki zamontowane winny być w miejscach wprowadzeń instalacji elektrycznej do budynku.
- Zapewniają kompletną ochronę instalacji elektrycznej oraz zasilanych z niej urządzeń elektrycznych przed działaniem części prądu piorunowego oraz innego rodzaju przepięciami.
- Redukują przepięcia i sprowadzają do ziemi prądy udarowe pochodzące od obu rodzajów przepięć – bezpośrednich oraz pośrednich. Zapewniają jednocześnie dwustopniowy poziom ochrony.
- Stosowanie modułowych ochronników przepięć VCX-L2-B+C klasy T1T2 4P 12,5kA L2 RED nie wymaga używania dławików odsprężających.
- Zapewniają skuteczną ochronę komputerów, urządzeń RTV/AGD i itp.
- Wyposażone są w wizualny wskaźnik działania (zielony – ochrona, czerwony – brak ochrony).



www.vcx.com.pl


Opis techniczny:

Klasa ochrony:	T1 T2
Wykonanie:	iskiernikowe
Przyłącza max:	35mm ²
Maksymalne napięcie pracy:	U _c 275V AC
Prąd próbny:	I _n (8/20) 20 kA
Prąd max:	I _{max} (8/20) 50 kA
Prąd impulsowy (na każdy biegun)	I _{imp} (10/350) 12,5kA
Prąd impulsowy I _{total}	I _{total} (10/350) 50kA
Napięciowy poziom ochrony:	U _p <1,2kV
Temperatura składowania:	-30/+70°C
Temperatura otoczenia pracy:	-30/+50°C
Klasa szczelności:	IP 20

Pakowanie i oznaczenia:

SERIA	NAZWA WYROBU	OPAKOWANIE	Nr KATALOGOWY
VCX-L2-4- B+C	Ogranicznik przepięć T1T2 BC 4P 12,5kA L2 RED	1 sztuka	BC 4P 12.5KA L2 RED

Schemat podłączenia:

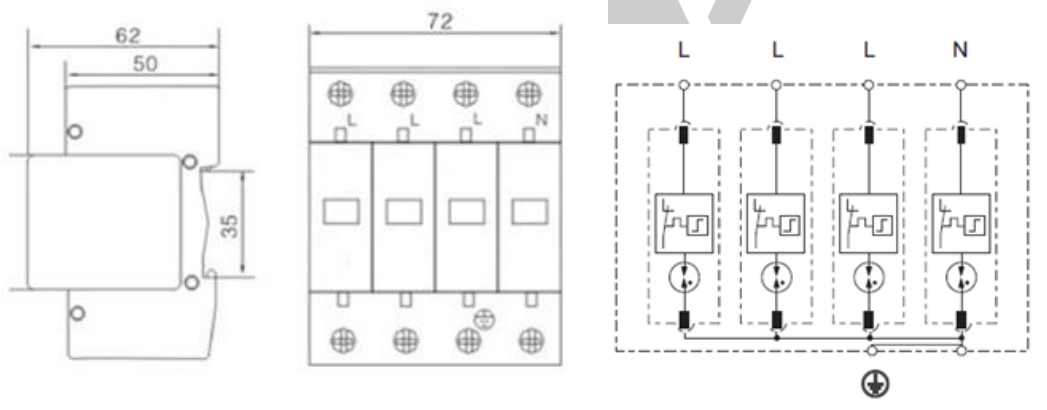



www.vcx.com.pl

DATA SHEET

Surge protector class T1T2 L2 RED (B+C) 4P 12.5 kA



- They are dedicated to protect low-voltage power supply installations from the effects of induced and switching overvoltages. They can be installed for network types: TN-S, TN-C, IT, TT.
- They should be used simultaneously as the first and second degree of protection in floor boards, sub-distribution boards. Protectors should be installed at the points of entry of electrical installations into the building.
- Provide complete protection of the electrical system and the electrical equipment supplied from it from the action of part of the lightning current and other types of surges.
- They reduce overvoltages and bring surge currents from both types of overvoltages - direct and indirect - to ground. They simultaneously provide a two-stage level of protection.
- The use of VCX-L2-B+C class T1T2 4P 12.5kA L2 RED modular surge protectors does not require the use of decoupling chokes.
- Provide effective protection for computers, consumer electronics/appliances and etc.
- They are equipped with a visual operational indicator (green - protection, red - no protection).



www.vcx.com.pl

Technical Description:

Protection Class:	T1 T2
Performance:	intrinsic
Connections max:	35mm ²
Maximum working voltage:	Uc 275V AC
Trial current:	In(8/20) 20 kA
Current max:	I _{max} (8/20) 50 kA
Pulse current (per pole)	I _{imp} (10/350) 12,5kA
I _{total} impulse current	I _{total} (10/350) 50kA
Voltage protection level:	Up <1,2kV
Storage temperature:	-30/+70°C
Operating ambient temperature:	-30/+50°C
Leakage class:	IP 20

Packaging and marking:

SERIES	NAME OF PRODUCT	OPAKOWANIE	CATALOGUE NO.
VCX-L2-4- B+C	Surge protector T1T2 BC 4P 12.5kA L2 RED	1 piece	BC 4P 12.5KA L2 RED

Connection diagram:

